

# Integrated gripper GR05-GR30

**engcon**<sup>®</sup>

## Integrated gripper for tiltrotators and rotators 3-33 tonnes

- » The gripper arms are made from high-strength steel for strength and low weight
- » Load-holding check valves in each gripper cylinder
- » The perfect workmate on the site
- » Versatile handling of posts, kerbstones and other objects
- » Practical for pipe laying and manhole positioning
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233
- » 3 finger claws as standard
- » Complies with European safety standards

### Features of the GR20B:

- ▶ Gripper width 820–950\* mm depending on quick hitch
- ▶ Stronger grab guards
- ▶ Fixed counterhold Improved axle locks

\* S60GR20 and S60GR20: 820 mm  
S70GR20 and S70GR20: 950 mm

### Features of the GR30 (S80):


- ▶ Gripper width up to 1080 mm



### Specifications

Model	GR05	GR10	GR20B	GR30*
Widest grab width A: (mm)	350	610	820–950*	1 080
Width B: (mm)	200	270	350	440
Length C: (mm)	585	760	910	980
Clamping force (tip - tip) at 21 MPa: (kg)	1,654	1,497	2,234	1,956
Max load: (kg)	1,000	1,500	2,000	2,200
Weight: (kg)*	50	70	85	148
Max hydraulic pressure: (MPa)	22	22	22	22

\* Depending on attachment

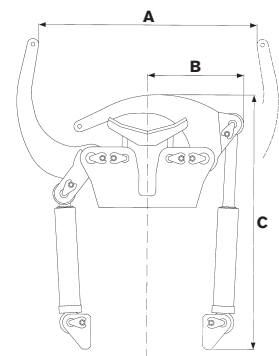

## TOOL SYSTEMS FOR INCREASED PROFITABILITY

**engcon Australia** 62 Power Street, St Marys, NSW 2760  
**Phone** 02 8328 0690 | **E-mail** australia@engcon.com | **Web** engcon.com